



ENERGY STAR® Qualified
in Highlighted Regions



= Qualified in all zones

ENERGY STAR® Qualified
in Highlighted Regions



= Qualified in all zones



National Fenestration
Rating Council®

CERTIFIED

WINDOWCRAFTERS

**700 UNEQUAL LITE
DOUBLE HUNG**

Vinyl frame, Double glazed,
Low E coating (e=0.034, S2),
Argon/air filled

CIN-K-6-00038



National Fenestration
Rating Council®

CERTIFIED

WINDOWCRAFTERS

**700 UNEQUAL LITE
DOUBLE HUNG**

Vinyl frame, Double glazed,
Low E coating (e=0.034, S2),
Argon/air filled, Grids

CIN-K-6-00038-00001

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P)

0.30

Solar Heat Gain Coefficient

0.28

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.53

—

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
www.nfrc.org

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P)

0.30

Solar Heat Gain Coefficient

0.25

ADDITIONAL PERFORMANCE RATINGS


Visible Transmittance

0.47

—


Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
www.nfrc.org

ENERGY STAR® Qualified
in Highlighted Regions



= Qualified in all zones

ENERGY STAR® Qualified
in Highlighted Regions

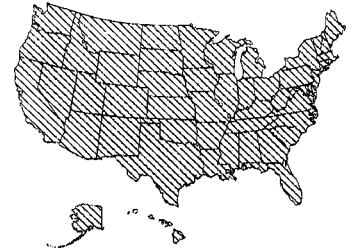

= Qualified in all zones



National Fenestration
Rating Council®

CERTIFIED

WINDOWCRAFTERS

**700 REPLACEMENT
PICTURE WINDOW**

Vinyl frame, Double glazed,
Low E coating (e=0.034, S2),
Argon/air filled

CIN-K-8-00045



National Fenestration
Rating Council®

CERTIFIED

WINDOWCRAFTERS

**700 REPLACEMENT
PICTURE WINDOW**

Vinyl frame, Double glazed,
Low E coating (e=0.034, S2),
Argon/air filled, Grids

CIN-K-8-00045-00001

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P)

0.29

Solar Heat Gain Coefficient

0.30

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.56

—

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
www.nfrc.org

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P)

0.29

Solar Heat Gain Coefficient

0.27

ADDITIONAL PERFORMANCE RATINGS


Visible Transmittance

0.50

—


Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
www.nfrc.org

ENERGY STAR® Qualified
in Highlighted Regions



= Qualified In all zones

ENERGY STAR® Qualified
in Highlighted Regions



= Qualified in all zones



National Fenestration
Rating Council®

CERTIFIED

WINDOWCRAFTERS

700 HORIZONTAL SLIDER

Vinyl frame, Double glazed,
Low E coating (e=0.034, S2),
Argon/air filled

CIN-K-5-00038



National Fenestration
Rating Council®

CERTIFIED

WINDOWCRAFTERS

700 HORIZONTAL SLIDER

Vinyl frame, Double glazed,
Low E coating (e=0.034, S2),
Argon/air filled, Grids

CIN-K-5-00038-00001

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P)

0.30

Solar Heat Gain Coefficient

0.28

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.52

—

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
www.nfrc.org

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P)

0.30

Solar Heat Gain Coefficient

0.25

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.46

—

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
www.nfrc.org